

Installation Specifications

CSI – 3 Part Spec available at www.CORONADO.com/ArchitecturalResources

Choices Specific to Texas Rubble

- Standard Colors:** Texas Cream, Cape Cod Grey, Antique Cream, Summer Cottage. Custom colors may be available for an upcharge.
- Grout Joint Width:** Standard 1/2" Grout Joint, 3/4" Grout Joint or Drystack
- Grouting Options:** Deep Raked, Drystack, Full Brushed or Full Tooled
- Grout Joint Color:** Natural Grey, Natural Off-White or Complementary Color
- Accessories:** Corners, Complementary Tiles, Wall Caps, Post Caps and more. (See Accessories section of binder)

Special Installation Notes

- Pattern:** Stone should be installed in a horizontal ashlar pattern. Do not install stones vertically. Blend the stone on the wall from several different boxes to ensure proper color and size variation.
See catalog photos for recommended installation pattern.
- Chalk Lines:** Should be used by installer to ensure a straight and level pattern.
- Vertical Joints:** Avoid exceeding 2 medium or 3 small stones in height.
- Horizontal Joints:** Avoid exceeding 6' to 8' in length.
- Sealing:** Not required. However, if installed on an exterior exposed to excessive water from runoff or improper drainage, we suggest the product be sealed in that particular area to protect it from staining or spalling during freeze-thaw cycles.
- Freeze-Thaw:** When installing stone in a freeze-thaw environment, extra care should be taken to ensure a full coverage of mortar on the back of each stone, which will prevent water pooling behind the stone after it has been installed.
- Drystack:** A polymer-modified mortar should be used for all drystack applications.
- Installation Info:** Download Coronado's latest installation instructions at www.coronado.com for information on mortar and installation recommendations.

Profile Properties

- Size:** Stone sizes range from 2" to 8" in height and up to 23" in length. Corner returns range from 3" to 14" (nominal).
- Thickness:** 1" to 2 1/2" (nominal).
- Weight:** 7 to 10 lbs. per square foot.
- Packaging:** Available in big boxes (110 sq ft Flats or 110 ln ft Corners) or Dura-Paks (15 sq ft Flats or 13.5 ln ft Corners).
When purchasing Texas Rubble, coverage is based on installation with a 1/2" joint at the back of the stone.
(Note: Square Footage and Linear Footage quantities may vary per region)


1/2" Deep Raked Grout Joint



TEXAS RUBBLE

COLOR: TEXAS CREAM

1/2" Deep Raked Grout Joint

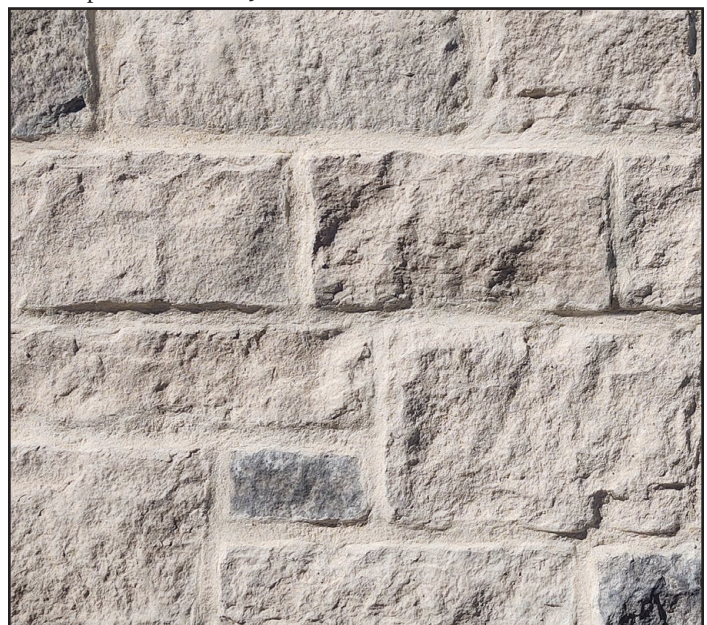

TEXAS RUBBLE

COLOR: SUMMER COTTAGE