

Installation Specifications

CSI – 3 Part Spec available at www.CORONADO.com/ArchitecturalResources

Choices Specific to Creek Rock

- Standard Colors:** Southwest Blend, Palm Springs Blend. Custom colors may be available for an upcharge.
- Grout Joint Width:** Standard ½" Grout Joint or Drystack (with some fill-in grout)
- Grouting Options:** Deep Raked or Drystack
- Grout Joint Color:** Natural Grey, Natural Off-White, White or Complementary Color
- Accessories:** Corners, Complementary Tiles, Wall Caps, Post Caps and more. (See Accessories section of binder)

Special Installation Notes

- Pattern:** Blend the stone on the wall from several different boxes to ensure proper color and size variation.
See catalog photos for recommended installation pattern.
- Grout Joints:** Install stones in a near-level position (10°-15° off-level maximum). Grouting may be necessary.
- Sealing:** Not required. However, if installed on an exterior exposed to excessive water from runoff or improper drainage, we suggest the product be sealed in that particular area to protect it from staining or spalling during freeze-thaw cycles.
- Freeze-Thaw:** When installing stone in a freeze-thaw environment, extra care should be taken to ensure a full coverage of mortar on the back of each stone, which will prevent water pooling behind the stone after it has been installed.
- Drystack:** A polymer-modified mortar should be used for all drystack applications.
- Installation Info:** Download Coronado's latest installation instructions at www.coronado.com for information on mortar and installation recommendations.

Profile Properties

- Size:** **Standard:** 3" to 10". Corner returns range from 3" to 12" (nominal).
Skippers: 1" to 2" in height and up to 6" in length (nominal).
- Thickness:** Varies from ¾" (edges) up to 2½" (center section). Note: Use 1¼" dimension for setting light fixtures (nominal).
- Weight:** 7 to 10 lbs. per square foot.
- Packaging:** Available in big boxes (100 sq ft Flats or 100 ln ft Corners) or Dura-Paks (12.5 sq ft Flats or 12.5 ln ft Corners).
When purchasing Creek Rock, coverage is based on installation with a ½" joint at the back of the stone.
(Note: Square Footage and Linear Footage quantities may vary per region)


½" Deep Raked White Grout Joint



CREEK ROCK

COLOR: *SOUTHWEST BLEND*

Drystack

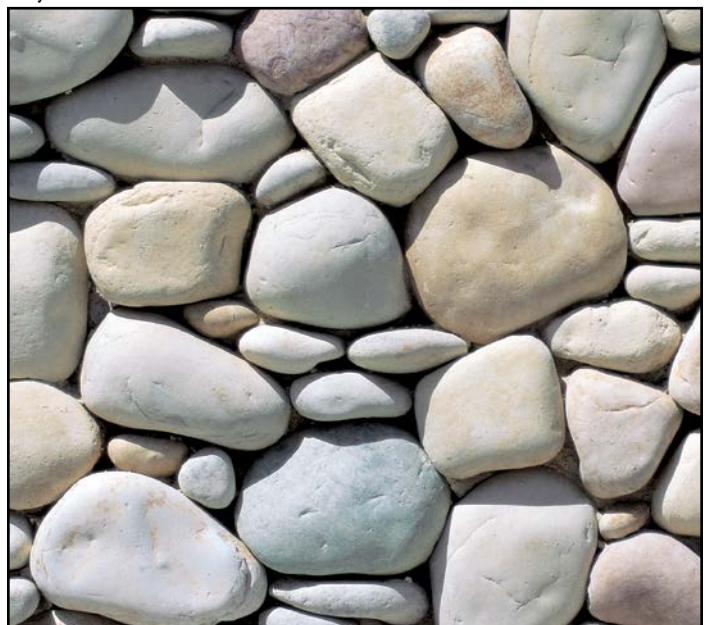

CREEK ROCK

COLOR: *PALM SPRINGS BLEND*